



**PART# 401500**

**2007-2018 GM 1500 2WD/4WD**



**REAR LOWERING SHOCK EXTENDERS**



1 HOUR INSTALL TIME

Components	Hardware
(2) SHOCK EXTENDERS	(4) 1/2-13 X 1" HEX CAP SCREW
(2) SQUARE PLATES	(4) 1/2-13 JAM NUT
	(4) 1/2" SPLIT LOCK WASHER
	(4) 1/2" FLAT WASHER
	(2) 7/16-14 X 1 1/4" HEX CAP SCREW
	(2) 7/16-14 NYLOCK NUT
	(4) 7/16" FLAT WASHER

**Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged**


**PRIOR TO INSTALLATION:**

- 1. Factory service manual is recommended to have on hand.**
- 2. Secure and properly block vehicle prior to beginning installation.**
- 3. Always wear safety glasses when using power tools or working under the vehicle**
- 4 Modification to any part will void the warranty associated with that product**

AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION




**Step 1** Jack up the rear of the truck and support under the frame rails with jack stands. Keep an adjustable jack under the axle for height adjustment.

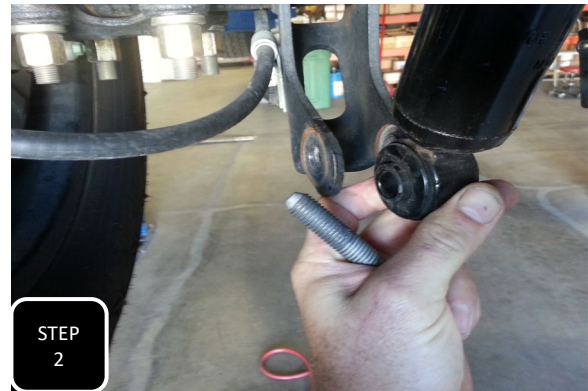

**Step 2** Unbolt both lower shocks from the axle and pivot them out of the way.



**Step 3** Slide the extender over the factory shock mount on the axle and loosely install the hardware. Install the flat washers onto the 1/2" bolts, install the 1/2" bolts through the factory shock hole, from the outside facing inward, then attach the 1/2" lock washer and jam nut. Then place the square plate over the ovalized opening inside the factory shock mount and attach it to the extender using the supplied 7/16" hardware.

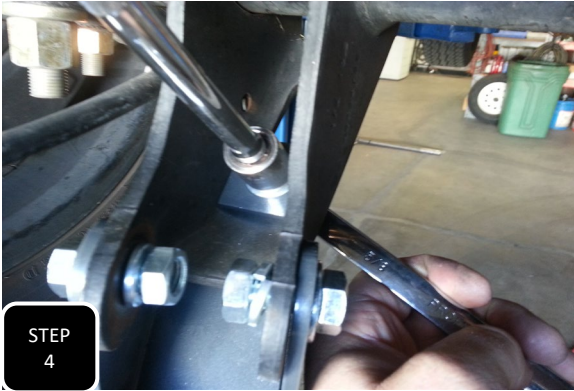

**Step 4** Tighten up the 7/16" bolt first and then the two 1/2" bolts.



**Step 5** Attach the shock to the extender using the factory hardware and tighten.