



MAXTRAC SUSPENSION
4522 E. EISENHOWER CIR.
ANAHEIM, CA 92807
714-630-0363
WWW.MAXTRACSUSPENSION.COM
SALES@MAXTRACSUSPENSION.COM

PRODUCT: 1628
COIL SPRING SPACERS
GM, RAM, JEEP

PARTS LIST QTY

COIL SPRING SPACERS	2
---------------------	---

PLEASE DOUBLE CHECK THE PARTS LIST BEFORE BEGINNING INSTALLATION TO ENSURE ALL PARTS ARE PRESENT. IF THERE IS SOMETHING MISSING, PLEASE CONTACT MAX TRAC IMMEDIATELY 714-630-0363

READ THE INSTRUCTIONS THOROUGHLY AND COMPLETELY BEFORE BEGINNING THE INSTALLATION.


PRIOR TO INSTALLATION:

1. Factory service manual is recommended to have on hand.
2. Secure and properly block vehicle prior to beginning installation.
3. Always wear safety glasses when using power tools or working under the vehicle.
4. Modifications to any part will void the warranty associated with that product.
5. Jack up front of vehicle, place jack stands under frame, behind front suspension.

After removing parts from vehicle, save hardware for reinstallation

IT IS RECOMMENDED THAT YOU HAVE YOUR VEHICLE'S ALIGNMENT CHECKED WHENEVER INSTALLING NEW SUSPENSION. IT IS ALSO RECOMMENDED THAT YOU ADJUST YOUR HEADLIGHTS WHENEVER YOUR VEHICLE'S RIDE HEIGHT IS ALTERED.

1. Jack up the rear of the vehicle and support with jack stands under the frame. Keep an adjustable jack under the axle to adjust the height.
2. Unbolt the rear shocks at the axle and lower the axle. (Be cautious not to stretch any brake or ABS lines). Remove the coils.

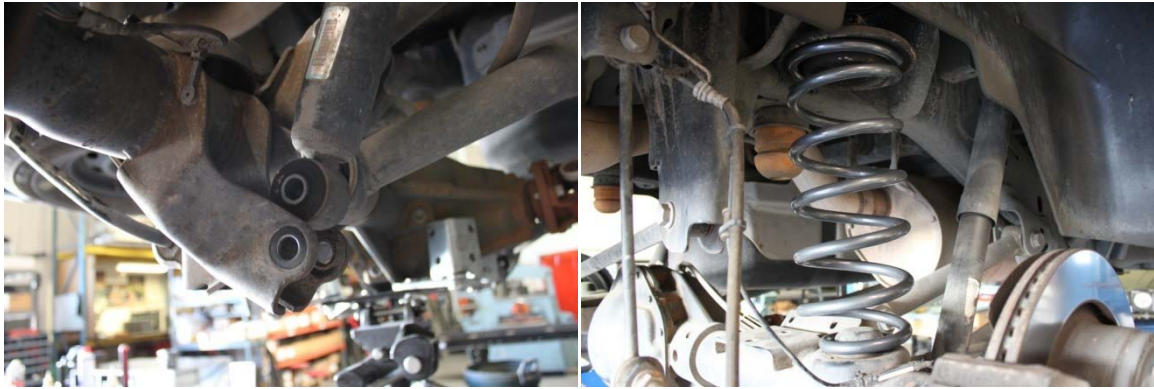

3. Set coil spacer on the bottom mount and reinstall the coil spring.
4. Jack up the axle and reattach the shocks.





MaxTrac
s u s p e n s i o n

RIDE HEIGHT SHEET

*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR _____ MAKE _____ MODEL _____

4WD / 2WD / AWD

MEASUREMENTS

*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____