




PART# 701935

2019+ GM 1500 2WD

3.5" FRONT LIFT SPINDLES

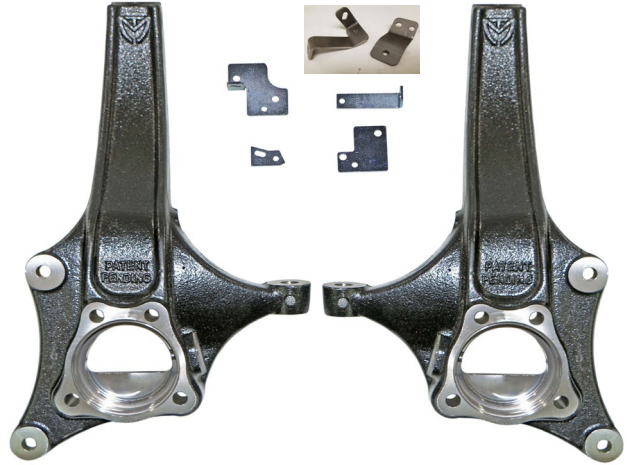

3 HOUR INSTALL TIME



WARNING

Max Trac Suspension recommends using an 18" x 9" wheel w/ 5.5" back spacing. Any wheel that is wider or has less back spacing "i.e. Deep Dish Wheels" can cause component failure and will void the warranty. Max Trac Suspension also recommends using a 35" x 12.5" tire with the spindle only or a 37" x 12.5" tire when combining a strut spacer with our spindle.

Components	Hardware
(1) 701935D DRIVE SIDE SPINDLE	(1) 1/4" LOOM CLAMP
(1) 701935 PASSENGER SIDE SPINDLE	(3) 3/8" LOOM CLAMP
(1) 7019FB-D1 DRIVE SIDE BRAKE LINE BRACKET	(2) 5" ZIP TIE
(1) 7019FB-D2 DRIVE SIDE BRAKE LINE BRACKET	(3) M6-1.0 X 16 HEX CAP SCREW
(1) 7019FB-P1 PASS SIDE BRAKE LINE BRACKET	(3) M6-1.0 NYLOCK NUT
(1) 7019FB-P2 PASS SIDE BRAKE LINE BRACKET	(6) M6 FLAT WASHER
(1) 7019FB-D120 DRIVE SIDE BRAKE LINE BRACKET	
(1) 7019FB-P120 PASS SIDE BRAKE LINE BRACKET	

Please double check the parts list before beginning installation to ensure all parts are present. If there is something missing, please contact Maxtrac Suspension (714) 630-0363. Please have the boxes present if parts are missing or damaged


PRIOR TO INSTALLATION:

- 1. Factory service manual is recommended to have on hand.**
- 2. Secure and properly block vehicle prior to beginning installation.**
- 3. Always wear safety glasses when using power tools or working under the vehicle**
- 4 Modification to any part will void the warranty associated with that product**


AFTER REMOVING PARTS FROM VEHICLE, SAVE HARDWARE FOR REINSTALLATION



Step 1 Jack up the front of the of the vehicle and support under the frame rails with jack stands. Remove both front tires and proceed with one side at a time.

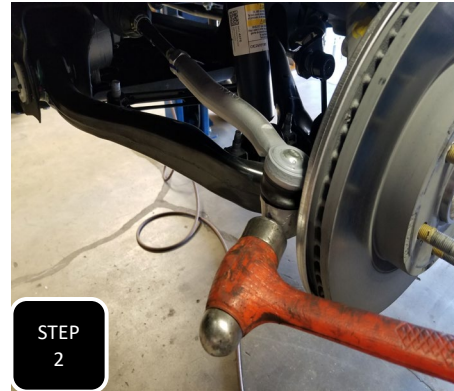

Step 2 Remove the nut attaching the outer tie rod to the steering knuckle and then break loose by hitting the side of the spindle with a hammer right at the joint. **NOTE: NEVER HIT THE TIE ROD ON THE THREADS**

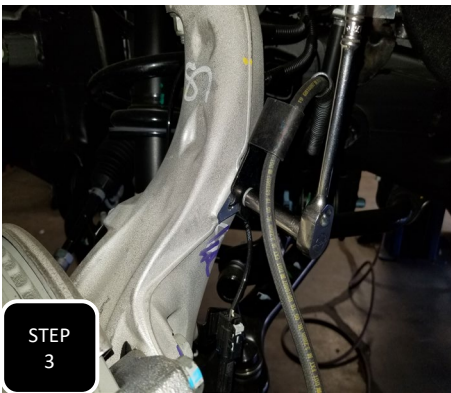


Step 3 Unbolt both the brake line bracket and the ABS line bracket from the neck of the spindle and separate. Save the bolts for use during installation.




Step 4 Unbolt both bolts attaching the brake caliper and support the brake caliper up out of the way. **NOTE: NEVER ALLOW THE BRAKE CALIPER TO HANG BY THE BRAKE LINE.**




Step 5 Unbolt the rotor retainer screw and remove the brake rotor.

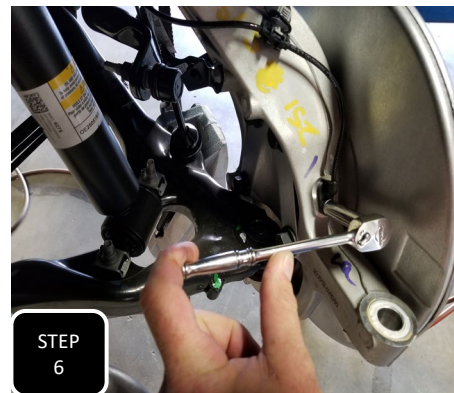



Step 6 Unbolt the front side ABS wire bracket and the ABS sensor mounting bolt, then remove the sensor. Drape the sensor up out of the way so it does not get damaged during the install.

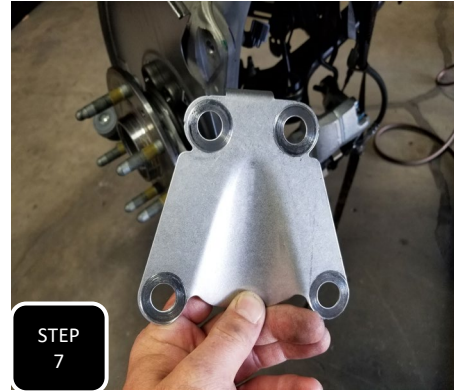

Step 7 Remove the wheel bearing by unbolting all four mounting bolts and set the bearing off to the side. The retainer plate from the back side can be discarded.

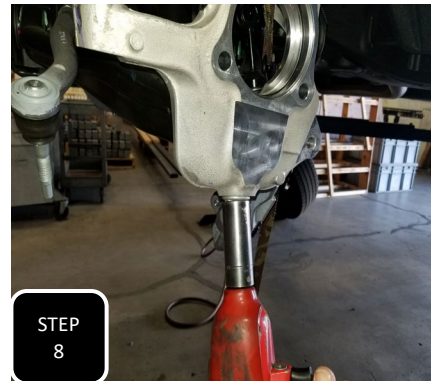

Step 8 Loosen but do not remove the nuts for the upper and lower ball joints.

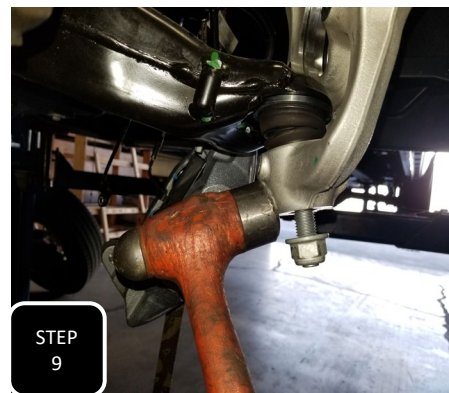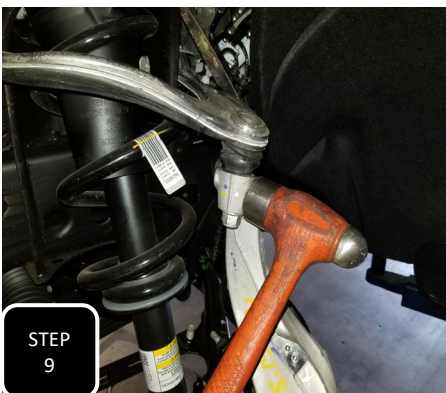

Step 9 Break each ball joint loose by hitting the side of the spindle, right at the ball joint, with a hammer. The nut will catch the spindle, then remove both nuts and the spindle. **NOTE: NEVER HIT THE BALL JOINT ON THE THREADS.**




Step 10 Attach the new spindle to the control arms using the factory nuts and tighten. **NOTE: IF YOU HAVE INSTALLED A STRUT SPACER THEN THE USE OF A FLOOR JACK TO COMPRESS THE SUSPENSION WILL HELP IN ATTACHING THE SPINDLE.**



Step 11 Using a dental pic or a small screw driver, remove the "O" ring from the hub bore in the factory spindle and re-install it into the hub bore of the new spindle.



Step 12 Locate the factory dust shield and mark a cut out about 1/2" down from the lower brake caliper ear opening. Using a suitable cutting device, cut out this marked section and clean up the edges.

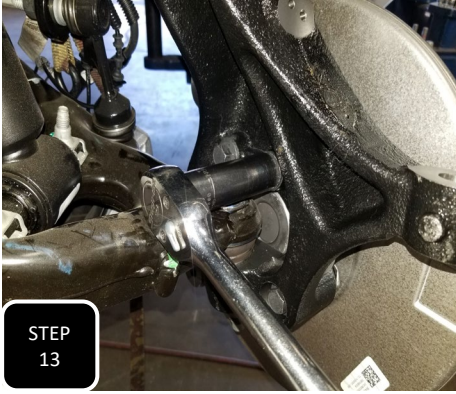

STEP
13

Step 13 Install the wheel bearing along with the factory dust shield using the factory bolts and tighten.




STEP
14



STEP
14

Step 14 Slide the rotor onto the wheel studs and attach it to the hub using the factory retainer bolt.

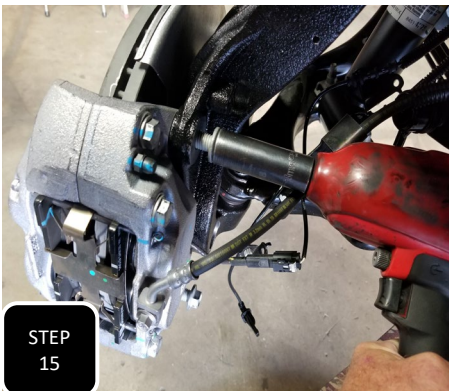


STEP
15


Step 15 Install the brake caliper using the factory bolts and tighten.




Step 16 Attach the ABS sensor and the guide bracket just above it using factory M6 bolts and tighten.

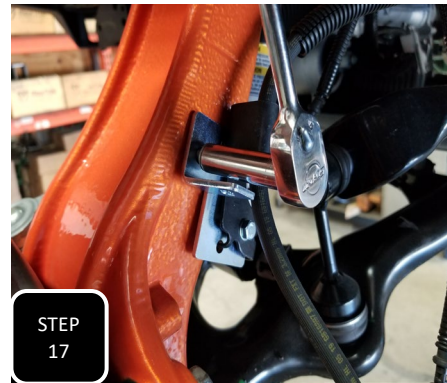

Step 17 (Driver's Side) For 2019 models, Locate the provided D1 bracket. For 2020+ models skip to step 18. Attach the factory brake line bracket to it using the provided M6 bolt, nut, and washer. Next, attach the bracket to the spindle using a factory M6 bolt and tighten both.

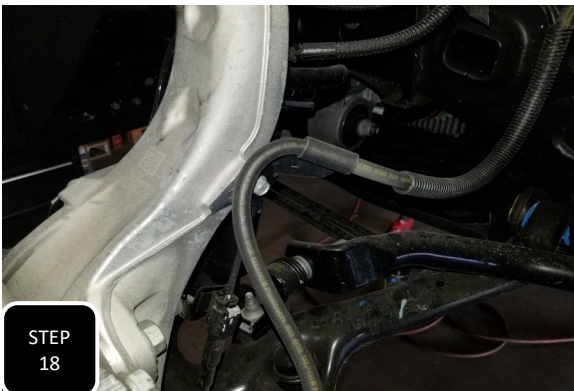


Step 18 (Driver's Side) Locate the provided D120 bracket. Attach the factory brake line bracket to it using the provided M6 bolt, nut, and washer. Next, attach the bracket to the spindle using a factory M6 bolt and tighten both.

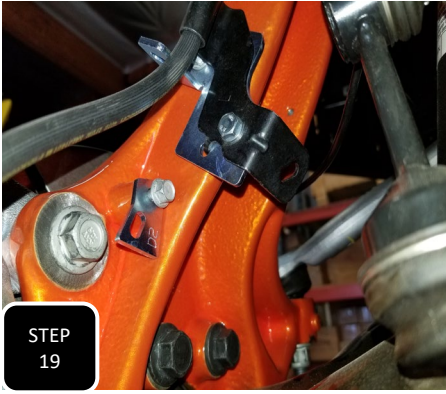


Step 19 (Driver's Side) Locate the provided bracket D2. Attach it to the mounting hole by the upper caliper bolt using a factory M6 bolt. Neatly guide the brake pad sensor wire and attach the two mounting clips to the ovalized holes in the D1 and D2 brackets.



Step 20 (Driver's Side) Neatly guide the ABS & brake pad sensor wires up the neck of the spindle and attach them to the upper mounting hole using the provided 1/4" loom clamps and a factory M6 bolt.

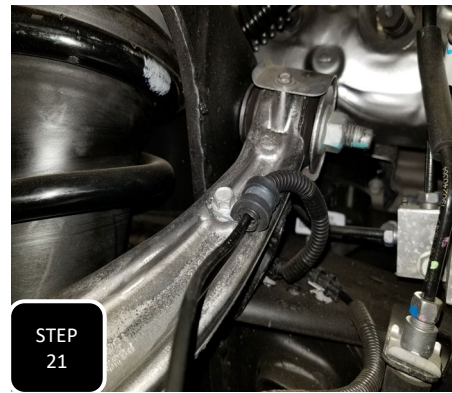


Step 21 (Drivers Side) Attach the 2 wires together at the rubber bushings using the provided zip ties. Next, attach the ABS wire to the upper control arm using the provided 3/8" loom clamp and factory M6 bolt.

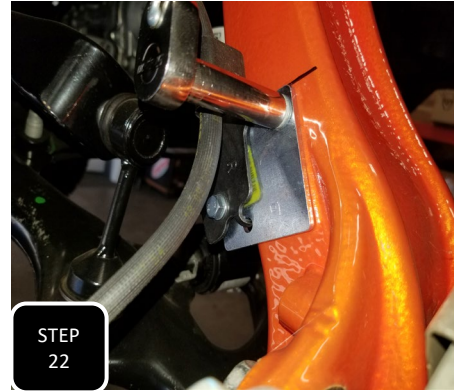


Step 22 (Passenger Side) For 2019 models, locate the P1 bracket and attach the factory brake line bracket to it using the provided M6 bolt, nut, and washer. For 2020+ models, skip to step 23. Next, attach the bracket to the spindle using a factory M6 bolt.




Step 23 (Passenger Side) For 2020+ models. Locate the P120 bracket and attach the factory brake line bracket to it using the provided M6 bolt, nut, and washer. Next, attach the bracket to the spindle using a factory M6 bolt.

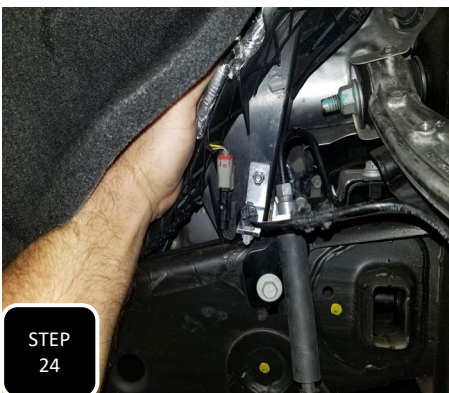

Step 24 (Passenger Side) Unhook the ABS guide clip from up near the hard brake line. Locate the P2 bracket and attach the bracket to the wheel well using the provided M6 bolt, nut, and washer. **NOTE: IT WILL HELP TO PULL BACK THE INNER FENDER A BIT AND INSTALL THE BOLT FROM THE BACK OF THE BRACKET.**

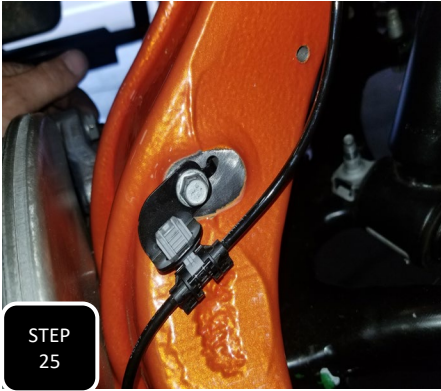

Step 25 (Passenger Side) Install the ABS sensor into the spindle using the factory bolt and tighten. Next, attach the two factory guide brackets to the neck of the spindle using a factory M6 bolt at each.

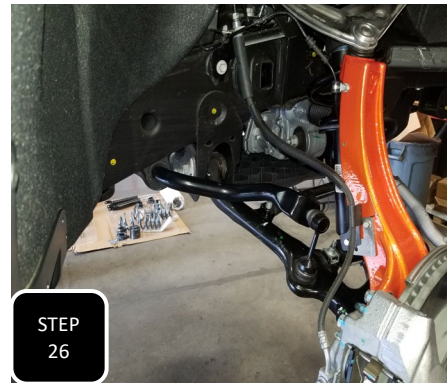

Step 26 (Passenger Side) Using the provided 1/4" loom clamp, attach the ABS wire to the top of the brake caliper side of the neck of the spindle using a factory M6 bolt.



Step 27 Attach the tie rod to the spindle using the factory nut and tighten.

-Make sure to check the vehicle's toe before driving.

-The headlights should be adjusted after modifying the stance of the vehicle.

-The vehicle's alignment will need to be adjusted.

-All suspension components should be re-torqued after 500



MaxTrac
s u s p e n s i o n

RIDE HEIGHT SHEET

*THIS SHEET MUST BE FILLED OUT PRIOR TO CALLING WITH ANY DISCREPENCIES

YEAR _____ MAKE _____ MODEL _____

4WD / 2WD / AWD

MEASUREMENTS

*MOST ACCURATE MEASUREMENT IS FROM THE BOTTOM OF THE RIM, STRAIGHT UP TO THE BOTTOM OF THE FENDER

*TRUE HEIGHT WONT BE ACCURATE UNTIL VEHICAL IS ALIGNED

*THE VEHICLE'S CASTER WILL BE INCREASED OR DECREASED IF ONLY THE FRONT OF THE VEHICLE IS MODIFIED

	BEFORE	AFTER	DIFFERENCE
DRIVER FRONT	_____	_____	_____
DRIVER REAR	_____	_____	_____
PASSENGER FRONT	_____	_____	_____
PASSENGER REAR	_____	_____	_____

LIMITED LIFETIME WARRANTY

Max Trac Suspension makes no warranty, expressed or implied, as to the merchantability, fitness for purpose, description, quality, productiveness, accuracy or any other matter with respect to every product, all such warranties being hereby specifically and expressly disclaimed by Max Trac. Max Trac may offer technical advice or assistance with regard to the products based on laboratory and/or field experience and customer understands and agrees that such advice represents only good faith opinions and does not constitute a warranty or guarantee. The sole and express warranty provided by Max Trac is to warrant that the products sold as listed comply with Max Trac's specification at the date and time of manufacture. Max Trac makes no warranty that such products shall meet such specification at any time after installation of products. Use of such product is specifically not warranted, and Max Trac specifically excludes from this express warranty parts subject to normal wear and tear after one year, finish after one year, damage resulting from failure to follow recommendations in installation manuals, competition or off-road use, and damages caused by aftermarket products. Max Trac's liability and customer's exclusive remedy for any breach of this limited express warranty is limited to repair, replacement, or refund at Max Trac's option and in Max Trac's sole discretion. There are no warranties which extend beyond the description on the face hereof.

Our limited lifetime warranty excludes the following items: bushings, bump stops, ball joints, tie rod ends, rod end/heim joints, and shock absorbers. These parts are subject to immediate wear and tear and are not considered defective when worn. They are warranted for twelve (12) months from the date of purchase only for defects in workmanship.

This Max Trac warranty is void if (1) the vehicle is not aligned after kit installation, (2) proper maintenance is not routinely performed, (3) the Max Trac products are misused or abused in any way in either installation or service, or (4) the products are used in a way that violates federal, state, or local law or regulation in any respect. Max Trac is not responsible for vehicle compatibility with other aftermarket products. Warranty coverage does not include consumer opinions regarding ride comfort, fitment and design after product installation.

Max Trac reserves the right to change, modify or cancel this warranty without prior notice.

WARRANTY RETURN

Contact Maxtrac by sending an email with a copy of the original purchase receipt, along with photographs clearly illustrating the failure mode.

1. Upon validating the information provided, Maxtrac will issue a Return Manufacturer Authorization number (RMA#).
2. Return your product to Max Trac Suspension at your expense in order to execute a claim under this warranty.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

NON-WARRANTY RETURN & CREDIT POLICY

Your item must be in its original unused and resalable condition to be returned, unless there is a manufacturing defect. You must return the item within 30 days of your purchase. Otherwise, there will be an additional restocking fee.

1. Please contact Max Trac Suspension at (844) 535-1668 to obtain a Return Manufacturer Authorization Number (RMA#).
2. Return your product to Max Trac Suspension at your expense.
3. Include the RMA# on the outside of the box. Any returns without the RMA# will be refused.

Return Exceptions

Merchandise that has been installed, used, or altered may be subject to no credit.

Restocking Fee

All items are subject to a restocking fee based on the condition of the packaging and product.

Max Trac Suspension does not credit shipping and handling. Credit minus applicable restocking fee will be determined and issued within 10 business days of product receipt.

All returns will be credited to your Maxtrac account.



INSTALLATION WARNINGS

READ INSTRUCTIONS AND WARNINGS COMPLETELY PRIOR TO INSTALLATION.

MAXTRAC IS NOT RESPONSIBLE FOR ANY DAMAGE OR INJURY DUE TO IMPROPER INSTALLATION OR MAINTENANCE.

Installer is responsible to insure a safe and controllable vehicle after performing modifications. All steps and procedures described in these instructions were performed while the vehicle was properly supported on a two post vehicle lift with safety jacks. Included instructions are recommended guidelines only.

Max Trac Suspension recommends reference to the OE Service Manual corresponding to the model and year of vehicle when either disassembling or assembling factory and related components.

Use caution during all disassembly and assembly steps to insure suspension components are not over extended, causing damage to any vehicle components and parts included in this kit. Unless otherwise specified, tighten all bolts and fasteners to standard torque specifications listed within the OE Service Manual.

Suspension components that use rubber or urethane bushings should be tightened with the vehicle at normal ride height. This will prevent premature wear or failure of the bushing and maintain ride comfort.

Larger tire and wheel combinations may increase leverage on suspension, steering, and related components.

Due to payload options and initial ride height variances, the amount of lift is a base figure. Final ride height dimensions may vary in accordance to original vehicle ride height. Always measure the vehicle ride height prior to beginning of installation.

MAXTRAC SUSPENSION DOES NOT ADVISE USING WHEELS WIDER THAN 9" OR WHEELS WITH LESS THAN 4.5" BACKSPACING. DOING SO WILL RESULT IN VOIDING ANY AND ALL MANUFACTURER WARRANTIES

Max Trac Suspension does not recommend the combined use of suspension lifts, body lifts, or other lifting devices.

Final Checks & Adjustments

Once the vehicle is lowered to the ground, check all parts which have rubber or urethane components to ensure proper torque. Torque lug nuts to the wheel manufacturer specs.

Move vehicle backwards and forwards a short distance to allow suspension components to settle. Turn the front wheels completely left then right and verify adequate tire, wheel, brake line, and ABS wire clearance.

Test and inspect steering, brake and suspension components for tightness and proper operation. Inspect brakes, hoses, and ABS lines for adequate slack at full extension, and adjust as necessary.



ADDITIONAL WARNINGS

WARNING

Max Trac Suspension products should ONLY be installed by a certified professional mechanic with experience working on and installing suspension products. Professional knowledge and skill will typically yield the best installation results.

If you need a list of installers in your area, please contact Max Trac Suspension customer service to find one of our authorized dealers. Max Trac Suspension does not warrant work performed by any dealer, installer, or mechanic.

- All lifted vehicles may require additional driveline modifications and/or balancing.
- A Factory Service Manual for your specific Year/ Make / Model should be referenced during installation.
- Use of a vehicle hoist will greatly reduce installation time.
- Speedometer / computer calibration is required if changing +/- from factory tire diameter.
- Vehicle must be in excellent operating condition. Repair or replace any and all worn or damaged components prior to installation.

FAILURE TO PERFORM POST INSTALLATION INSPECTION AND/OR CHECKS MAY RESULT IN VEHICLE COMPONENT DAMAGE AND/OR PERSONAL INJURY OR DEATH.

RECHECK ALL HARDWARE FOR PROPER TORQUE VALUES AFTER 500 MILES, AND THEN PERIODICALLY AT EACH SERVICE INTERVAL THERAFTER.

Vehicle Handling Warning

Increasing the height of your vehicle raises the center of gravity and **WILL** affect stability and control. Use caution on turns and when steering. Vehicles with larger tires and wheels will handle differently than stock vehicles. Take time to familiarize yourself with the handling of your vehicle after product installation.

Wheel Alignment/Headlamp Adjustment

It is necessary after installation to have a wheel alignment performed by a certified alignment technician. Align the vehicle to factory specifications. It is recommended that your vehicle alignment be checked after any off-road driving. In addition to vehicle alignment, it is necessary to check and adjust vehicle head lamps for proper aim and alignment. If the vehicle is equipped with active or passive safety/collision monitoring and / or avoidance systems including, but not limited to, camera-or radar-based systems, check and adjust your vehicle's systems for proper aim and function.

Braking Warning

Generally, braking performance and capabilities are decreased when significantly larger or heavier tires and wheels are used. Take this into consideration while driving. Also, changing axle gear ratios or using tires that are taller or shorter than factory height will cause an erroneous speedometer reading. On vehicles equipped with an electronic speedometer, the speed signal impacts other important functions as well. Speedometer recalibration for both mechanical and electronic types is highly recommended.



SAFETY WARNINGS

SAFETY WARNING

MISUSE OF THIS PRODUCT COULD LEAD TO INJURY OR DEATH.

- Suspension systems or components that enhance the on and off-road performance of your vehicle may cause it to handle differently than it did from the factory. EXTREME CARE must be used to prevent loss of control or vehicle rollover during operation.
- ALWAYS operate your vehicle at reduced speeds and maintain distance between vehicles and obstacles to ensure your ability to control your vehicle under all driving conditions. Failure to drive safely may result in serious injury or death to the driver and passengers.
- Driver and passengers must ALWAYS wear seat belts, avoid rapid steering angles and rates and other sudden maneuvers.
- You should NEVER operate your vehicle under the influence of alcohol or drugs.
- Please check all factory components for excessive wear and tear. Please replace worn factory parts before installing any suspension kits. Failure to do so will void any Max Trac warranty.
- Please inspect all wheel bearings and hub bearings for excessive wear and replace worn components before installing suspension kits. These hub and wheel bearings may wear out sooner with installation of larger tires and wheels. MaxTrac does not warranty these factory parts at any time, also using any wheel that MaxTrac does not recommend will void any warranty of MaxTrac components.
- Constant maintenance is required to keep your vehicle safe. Thoroughly inspect your vehicle before and after every off-road use.
- It is the responsibility of the retailer and/or the installer to review all state and local laws with the end user of this product related to bumper height laws and the lifting of a vehicle before the purchase and installation of any Max Trac products.
- It is the responsibility of the driver to check the area around the vehicle for obstructions, people, and animals before moving the vehicle.
- All lifted vehicles have increased blind spots. Take note of these prior to operating the vehicle.

DAMAGE, INJURY AND/OR DEATH CAN OCCUR IF ANY OF THE ABOVE WARNINGS ARE NOT FOLLOWED.